



产品特点


- 工业MicroATX主板, H61 芯片组;
- 支持Sandy Bridge IntelCore i7/i5/i3处理器的;
- 支持1*VGA, 1*HDMI 显示接口, 4个COM接口, 4-6个USB2.0, 双千兆网口;
- 整机符合EMC设计标准, 具有优异的抗电磁干扰和防辐射能力;
- 标配4个4028滚珠风扇, 在机箱内部形成良好的散热风道;
- 箱前面板和挂耳使用铝型材加工而成, 采用拉丝氧化工艺;
- 1U 工业ATX电源, 2个3.5" HDD或4个2.5" HDD/SSD;
- 广泛应用于存储、应用服务器和安防等领域



可选配系统

型号	DG332-C
处理器	I7-2600 3.4GHz(up to 3.8GHz) 4 core 8 Threads 95W I5-2400 3.1GHz(up to 3.4GHz) 4 core 4 Threads 95W I3-2120 3.3GHz 2 core 4 Threads 65W G850 2.9GHz 2 core 2 Threads 65W
主板芯片	Intel H61 Express Chipset
图像显示	Intel HD Graphics;Display output: HDMI and VGA Supports 6 Graphics Execution Units; Intel Clear Video Technology; DirectX Video Acceleration support for accelerating video processing
内存	2 x DDR3 DIMM Max.16GB
SATA	4 SATA 2.0 ports with data transfer rate up to 3Gb/s
LAN	2 Gigabit LAN ports;Integrated 10/100/1000 transceiver Fully compliant with IEEE802.3,IEEE802.3u,IEEE802.3ab
后面板I/O端口	1 mini-DIN-6 PS/2 mouse port;1 mini-DIN-6 PS/2 keyboard port 2 DB-9 serial ports: 1 RS232/422/485 ; 1 RS232 1 HDMI port (optional);1 DB-15 VGA port 2 RJ45 LAN ports;4 USB 2.0/1.1 ports Mic-in, line-in and line-out jacks
前面板	2xUSB 2.0; Reset键; Powersw键; HDD LED; Power LED
可扩展接口	2 x RS232 或 2 x USB 2.0
支持操作系统	Windows XP Professional x86 & SP3 (32-bit) Windows 7 Ultimate x86 & SP1 (32-bit) Windows 7 Ultimate x64 & SP1 (64-bit) Windows 8 Enterprise x86 (32-bit) Windows 8 Enterprise x64 (64-bit) LINUX
运行温度	0 °C — 60 °C
存储温度	-20 °C — 85 °C
工作湿度	10% ~ 90% 非冷凝
电源	ATX AC 220V 输入

产品尺寸

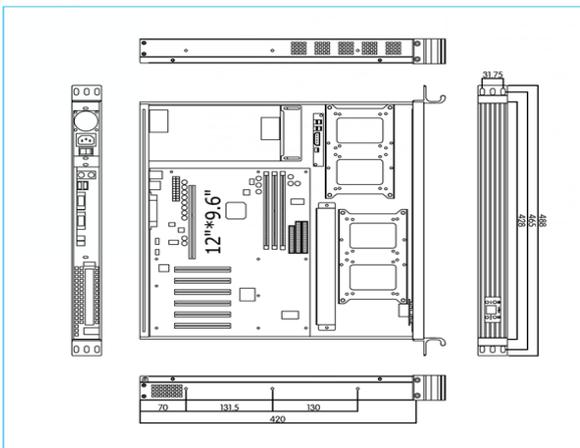

- ①. 4028 风扇
- ②. POWER LED
- ③. POWER SW
- ④. USB 接口
- ⑤. RESET
- ⑥. HDD LED
- ⑦. 1U 电源
- ⑧. 风扇 PCB 板
- ⑨. 硬盘支架